

MIZAR 30

Mizar30嵌入式系列安装说明书
Mizar30 recessed series installation instructions

系列	单灯尺寸	拼接灯体尺寸	开孔尺寸
LR00203	94*38*56mm	89*38*56mm	89*32mm
LR00204	178*38*56mm	172*38*56mm	172*32mm
LR00207	344*38*56mm	338*38*56mm	338*32mm
	510*38*56mm	505*38*56mm	505*32mm
	1010*38*56mm	1005*38*56mm	1005*32mm

一、单灯安装步骤(恒压版)：

1 将灯体公母插，母端剪掉。剪掉后棕色线为“+”，蓝色线为“-”

2 断电后，灯具接恒压电源(注意正负极)，并将恒压电源接市电，完成后电源塞入天花孔内。

3 掰开弹片，先将卡入一端弹片，然后再将另一端弹片卡入。

1.

2.

二、拼接方法：

1 直线拼接方法
拼接时，用螺丝刀将螺丝拧开，拆出两端侧盖

2 掰开弹片，先将卡入一端弹片，然后再将另一端弹片卡入，首尾两端需将侧盖用螺丝锁上，单回路最长可拼接4010mm

3 L形拼接方法
用螺丝固定灯具与连接头，再将拼接灯体之间公母插连上。

3.

4 去除侧盖，依次拼接，首尾两端需将侧盖用螺丝锁上，单回路最长可拼接4010mm

5 拼接，接线示意图

拼接接线完成图


三、注意事项：

- 1、请在断电情况下进行接线、安装等作业！
- 2、按对应型号的开孔尺寸在天花板开孔。
- 3、接线端子不可承重，安装过程中不可提线操作！
- 4、拼接最大总长度不可超过5米。
- 5、T形拼接、十字形拼接可按L形拼接方式拼接。
- 6、具体外观以实物为准！


4.

三、单灯安装步骤(恒流版)


01 参照上表,按灯体长度所对应的开孔尺寸在天花板上开孔,引出电源线.

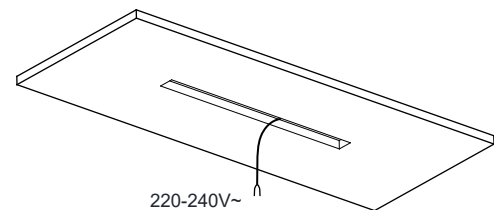

02 整理电源线,驱动置入天花板.

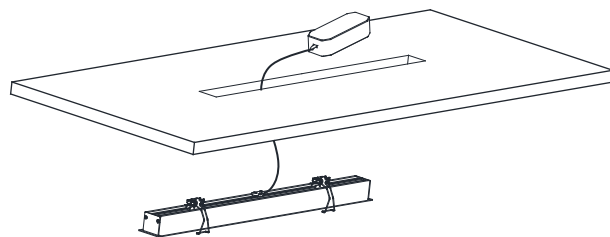

03 掰开弹片,先卡入一头弹片安装后再卡入另一头弹片,安装完成.

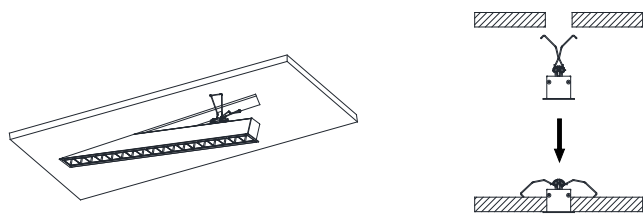

不要用手或者毛巾拭擦芯片与反射器!
Do not clean LED chip and reflector with hand or towel!



- 只能使用符合IEC或CCC安全标准的电源;
- 检查电源是否匹配灯具;
- 须考虑到最大电流值;
- 灯具上显示电压不是用来选择恒压电源,而是表示所选择恒流电源所覆盖的电压;
- 采用合适的ESD措施,避免触摸裸导体;
- 若与某种化学物质或气体接触,LED芯片会受损;
- 因此不能用化学物质清理LED壳体或LED驱动灯,如下物质证实对灯具的性能有负面影响,不能与LED灯具处在同一环境下。

指甲油
超能胶水
乙二醇
甲醛
LOCTITE胶水
漂白粉,含漂白粉的清洁剂、喷雾剂
LOCTITE 384胶
LOCTITE 7387 活化剂

- 将绝缘物移开或提供足够空间以便灯具本身的温升不会超过额定的;
- LED芯片对开关瞬态很敏感,因此LED灯具与电器必须在断电状态下连接,不可热插拔。
- VF建议使用灯具说明书上指示的电源。
- 须顾及到产品的极性。
- 室内灯具建议使用环境温度-10° C-40° C
- 如果此灯具的外部软缆或软线损坏了,该线要由制造商或其服务代理商或有类似资格的人更换
- 此灯具内的光源应由制造商或其服务代理商或有类似资格的人来更换

5.

- Use only drivers that comply with IEC or CCC safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
Methyl acetate or ethyl acetate (i.e., nail polish remover)
Cyanoacrylates (i.e., "Superglue")
Glycol ethers (including Radio Shack ® Precision Electronics
Cleaner - dipropylene glycol monomethyl ether)
Formaldehyde or butadiene (including Ashland PLIOBOND ® adhesive)
Dymax 984-LVUF conformal coating
Loctite Sumo Glue、Loctite 384 adhesive、Loctite 7387 activator
Gorilla Glue、Bleach, Bleach-containing cleaners, sprays

- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- VF recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- It is recommended to use an ambient temperature of -10 ° C to 40 ° C for indoor lighting equipment
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person

6.



该产品只能安装在室内环境,不能与水接触。
This product is only suitable for indoor, it is not allowed to be rinsed with water.

外置恒压24V电源,嵌入式安装。
24V Constant voltage LED independent driver, recessed mounted.

爱加照明科技有限公司

广东省东莞市大朗镇洋乌村乌石岭三区438号

Tel: 0769-8539 7723 / 8539 7729 Fax: 0769-8258 3418

E-mail: info@vflighting.com Http: //www.vflighting.com

7.

8.